



ADJUSTABLE SPRING POWER SURFACE APPLIED GRADE 1 CLOSER

44CI SERIES

HANDICAP

FEATURES

- Application for HIGH TRAFFIC Doors
- Cast Iron Body; Forged Steel Arm
- Double Heat Treated Steel Pinion
- All Weather Fluid
- Non-Handed
- Non-Sized Adjustable 1 Through 6; Standard with Back Check
- Universal Application for Regular Arm, Top Jamb, or Parallel Arm Mounting
- Standard Plastic Cover - Non Handed
- 10 year Warranty



OPTIONS AVAILABLE

- Metal Cover
- Heavy Duty Arm (EDA)
- Hold-Open arm
- Stop Only Arm
- Friction Hold Open Arm



[View 3D Model Online](#)

FINISHES

- AL - Aluminum
- DU - Storefront Bronze

10 YEAR WARRANTY


COMPLIANCE STANDARDS

- ANSI/BHMA A156.4 Grade 1 Certified
- UL/C-UL Listed
- UL 10B and UL 10C Compliant for positive pressure
- Certified to Conform to UBC 7-2 (1997, UL 228)
- Barrier Free Operation to Comply with Federal Accessibility Standards (ADA): Complying with ANSI A117.1 (4.13.11)

(Other finishes available by Special Order)

TECHNICAL DIMENSIONS

| Description | Dimensions |
|---------------------------------------|-------------|
| A. Length of Closer Body (With Cover) | 12-1/4" |
| B. Horizontal Mounting Holes | SEE DRAWING |
| C. Vertical Mounting Holes | 2-1/4" |
| D. Overall Height | 4-7/8" |
| E. Top of Door to Bottom of Closer | 3-11/16" |
| F. Closer Body Height | 3-1/2" |
| G. Projection from Door | 2-1/4" |

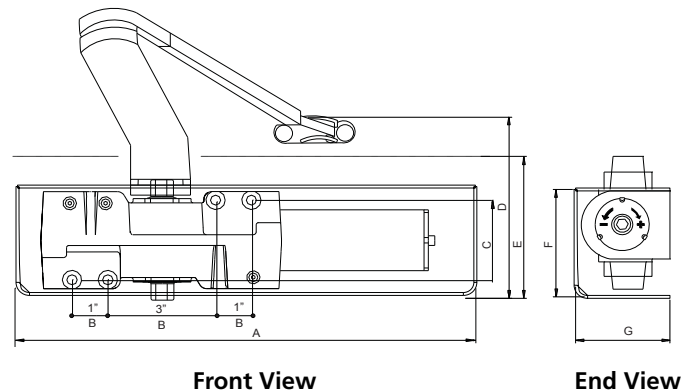

Front View

End View


International Door Closers, Inc.

COPYRIGHT 2017 INTERNATIONAL DOOR CLOSERS, INC


West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com

INSTALLATION TYPES

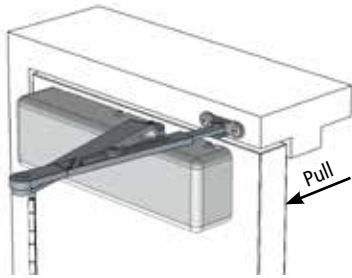

Regular Arm (Pull Side)
Permits 120° maximum opening

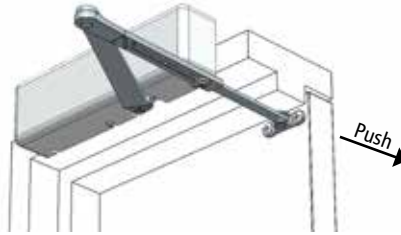

Top Jamb (Push Side)
Permits 120° maximum opening



Parallel Arm (Push Side)
Permits 180° maximum opening

PARTS AND ACCESSORIES

PART NO.

| | | |
|---|---|---------|
|  | Plastic Dress Cover | DC-44 |
| | Metal Dress Cover (special order) | DC-44M |
|  | Complete Arm Assembly | 44-2021 |
|  | Cushion - Hold-open arm - Mechanical Turn Type | 44-2022 |
|  | Cushion Stop Arm | 44-2023 |
| | Friction Hold Open Arm | 44-2024 |
| | Heavy Duty Arm (EDA) | 44-2026 |
|  | Parallel Bracket | 425 |
|  | Drop Plate for Pull Side installation when top Door Rail is less than 3-3/4". Requires a 2" minimum height Door Rail. | 44-18 |
|  | Drop Plate for Top Jamb installation when ceiling is flush to top of Header. Requires a minimum 1-3/4" header height. | 44-18G |
|  | Drop Plate for Top Jamb installation on Door Headers less than 3-1/2" in height. | 44-18J |
|  | Drop Plate for Parallel Arm installation on Door Rails less than 5-1/2" (measured down from the door stop). Requires a 2" minimum height Door Rail. | 44-18PA |

SPECIFY FINISH:
 • AL - Aluminum
 • DU - Storefront Bronze