



ACTIVATION SENSORS FOR INDUSTRIAL DOORS

FALCON

MOTION SENSOR



FEATURES


- Uni- and bi-directional microwave motion detection
- Multiple models and settings allow the Falcon family to cover various applications (explosion-proof housing available)
- Can reject pedestrian and parallel traffic
- Supplied mounting bracket allows multiple mounting options from 0° to 180° tilt
- A telescopic, heavy-duty mounting bracket offers extension up to 3-feet (optional)
- NEMA 4 rated enclosure provides protection against dust, cleaning agents and environmental conditions

Intelligence & Durability, All In One Enclosure

The Falcon is a uni- and bi-directional motion sensor optimizing the performance of automatic doors. The Falcon detects moving objects and can reject pedestrian traffic and parallel traffic.

By detecting vehicles and rejecting parallel traffic, the Falcon reduces door cycling and helps save energy.

Pedestrian Rejection Capable

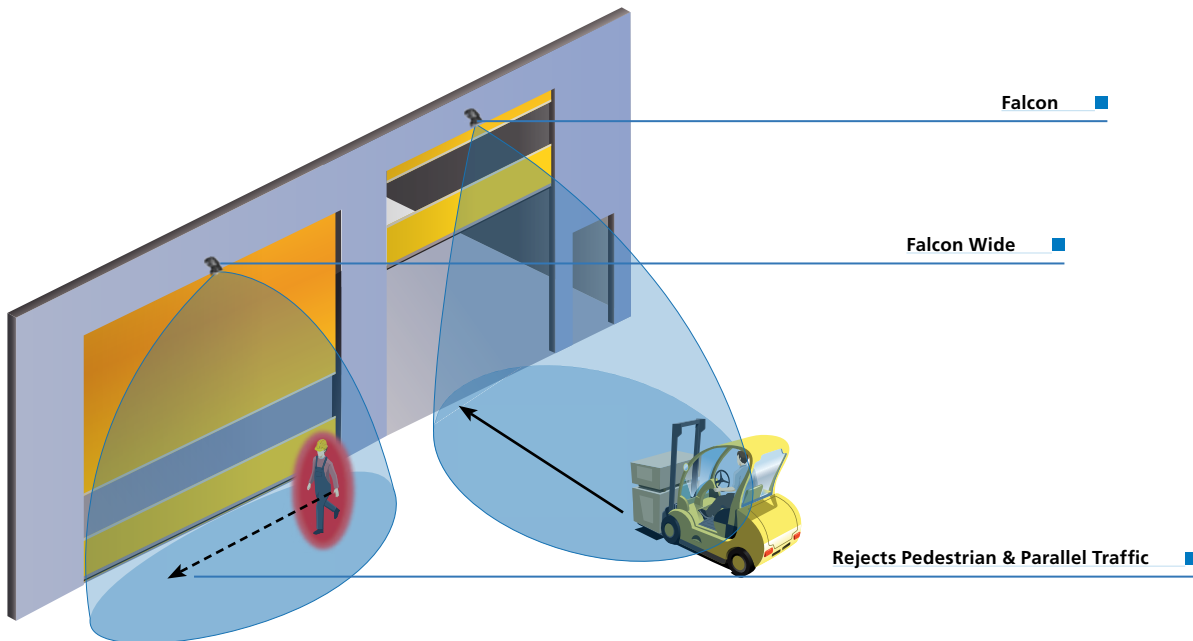


International Door Closers, Inc.


COPYRIGHT 2014 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737


www.intldoorclosers.com

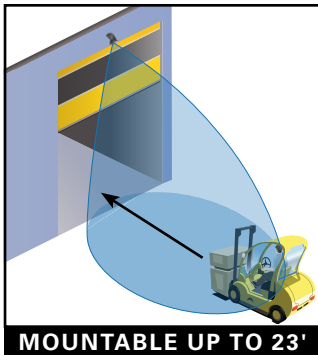


MOUNTABLE UP TO 23'



PARALLEL TRAFFIC REJECTION



VEHICLE DETECTION






PEDESTRIAN TRAFFIC REJECTION



**FALCON EX;
FALCON EX XL**

DETECTION ZONES (S=SENSITIVITY)

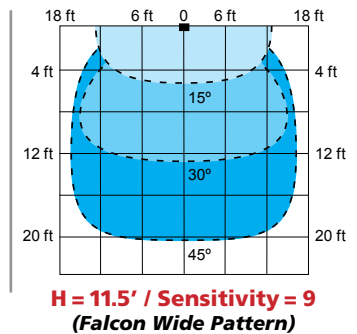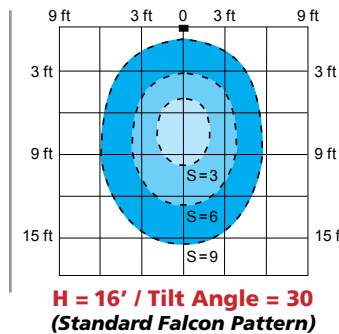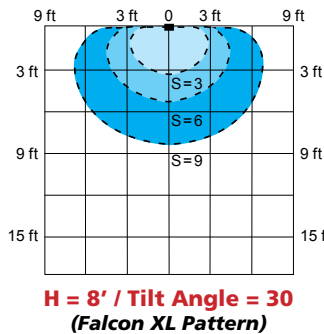

TECHNICAL SPECIFICATIONS

Technology	K-Band Microwave Doppler Radar
Radiated Frequency	24.125 GHz
Transmitter Radiated Frequency	< 20 dBm EIRP
Radiated Power Density	< 5 mW / cm ²
Detection Mode	Motion
Detection Zone (WxD)	
Falcon (narrow pattern)	13 ft x 16 ft; @ 16 ft
Falcon XL (wide pattern)	13 ft x 6.5 ft; @ 8.2 ft
Falcon Wide (extra wide pattern)	30 ft x 11 ft; @ 21 ft
Tilt Angles	0° to 180° when mounted vertically
Output	Relay (free of potential change-over contact)
Maximum Contact Voltage	42 V AC/DC
Maximum Contact Current	1 A (resistive)
Maximum Switching Power	30 W (DC); 60 VA (AC)
Output Hold Time	0.5 to 9 seconds (adjustable)
Reaction Time	100 ms
Minimum Detection Speed	2.2 in/s
LED Signals	Green: Value indication Red: Detection state & parameter indication
Mains Frequency	50 to 60 Hz
Supply Voltage	12 to 24 VAC; ±10% 12 to 24 VDC; +30% / -10%
Maximum Power Consumption	< 2 W
Mounting Height	Falcon: 11.5 to 23 ft Falcon XL: 6.5 to 11.5 ft Falcon Wide: 11.5 to 21 ft
Dimensions (WxLxH)	4.14 x 6.54 x 3.82 inches
Materials	ABS & Polycarbonate
Temperature Range	-22° F to +140° F
Degree of Protection	NEMA 4 (IP65)
Humidity	0-95% non condensing
Norm of Conformity	EMC: 2004 / 108 / EC R&TTE: 1999 / 5 / EC

Specifications are subject to change without prior notice.

DISCLAIMER This document as well as all other enclosed documents (quotation / specification / other) are provided «as is» without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will IDC be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / IDC has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.

