



FLUSHBOLTS

HARDWARE

FB-1200 FLUSHBOLT

- 15/16" x 4-1/4" Radius Face
- Positive "U" joint actuator with 5/8" throw ..
- 1/8", 3/16" and 1/4" offset with 7/8" backset
- Rod length for 12" Centerline of face installation
- Square Nylon Tip with beveled corners fits in 1/2" square hole
- Finishes Available:
 - AL - Baked Satin Aluminum Paint
 - BK - Baked Black Paint
 - DU - Baked Storefront Bronze Paint

Ordering Information
FB-1201 1/8" offset, without guide
FB-1202 1/8" offset, with guide
FB-1203 1/4" offset, without guide
FB-1204 1/4" offset, with guide
FB-1205 3/16" offset, without guide
FB-1206 3/16" offset, with guide

Specify: Model Number Standard or Extended Hole Guide Finish

FB-1201-K FLUSHBOLT

- 15/16" x 4-1/4" Radius Face
- Positive "U" joint actuator with 5/8" throw
- 1/8" offset with 11/16" backset
- Square Nylon Tip with beveled corners fits in 1/2" square hole
- Finishes Available:
 - AL - Baked Satin Aluminum Paint
 - BK - Baked Black Paint
 - DU - Baked Storefront Bronze Paint

Specify: Finish

ER-1200 FLUSHBOLT EXTENSION ROD

- 1/4-20 x 12" Threaded rod
- Includes coupler

FG-1200 STANDARD FLUSHBOLT GUIDE

- For use with FB-1200 and FB-2200 Flushbolts



FG-1250 EXTENDED HOLE FLUSHBOLT GUIDE

- For use with FB-1200 and FB-2200 Flushbolts



FB-2200 FLUSHBOLT

- 15/16" x 4-1/4" Radius Face
- Positive "U" joint actuator with 7/8" throw
- 1/8" and 1/4" offset with 7/8" backset
- Rod length for 12" Centerline of face installation
- Square Nylon Tip with beveled corners fits in 1/2" square hole
- Finishes Available:
 - AL - Baked Satin Aluminum Paint
 - BK - Baked Black Paint
 - DU - Baked Storefront Bronze Paint

Ordering Information
FB-2201 1/8" offset, without guide
FB-2202 1/8" offset, with guide
FB-2203 1/4" offset, without guide
FB-2204 1/4" offset, with guide
FB-1205 3/16" offset, without guide
FB-1206 3/16" offset, with guide

Specify: Model Number Standard or Extended Hole Guide Finish



FLUSH BOLTS • COORDINATORS

FLUSH BOLTS

COORDINATORS



AUTOMATIC FLUSH BOLTS

When active door is closed the bolt automatically projects to lock inactive door. Bolt retracts when active door is opened.


BHMA 4.4 TYPE 25: ANSI 156.3 UL Listed



1860P



1862P

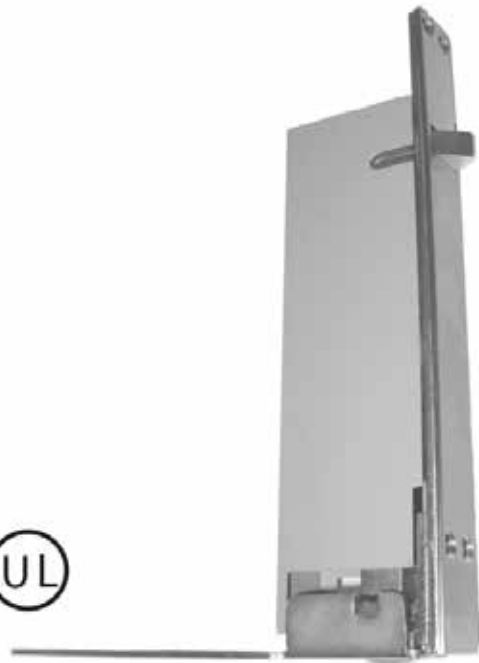

1860P PAIRS FOR METAL DOORS

- Fits ANSI prep for Metal doors
- 3/4" throw with 2" vertical adjustment. Adjustment can be made without removing door from frame
- UL listed 3 hrs on metal door up to 4' wide and 8' high
- If strike is misaligned, override prevents damage to door, frame or
- Dust proof strikes - 1870 for and/or threshold, 1872 for threshold only

1862P PAIRS FOR METAL DOORS

- 3/4" throw with 3/4" vertical adjustment. Adjustment can be made without removing door from frame
- UL listed 1-1/2 hrs on wood doors up to 4' and 8' high
- If strike and bolt are misaligned, override prevents damage to door, frame or flush bolt
- Dust proof strikes- 1870 for floor and/or threshold, 1872 for threshold only

International Door Closers, Inc.

COPYRIGHT 2014 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com

MANUAL FLUSH BOLTS

Used to lock and unlock an inactive door when the active door is open. When the inactive door is closed, moving the lock lever up locks it and moving the lever down unlocks it. Meets FED SPEC 1049 : BHMA L14081: ANSI 156.16. UL Listed.

1855S SINGLE UNIT FOR METAL DOORS

- Non-handed
- 5/8" throw with 7/8" vertical adjustment
- Standard rod length is 12". Other lengths are available on request
- Dust proof strikes - 1870 for floor and/or threshold, 1872 for threshold only
- Available in most architectural finishes
- UL listed for use on metal covered doors up to 4' wide and 10' high



1855S



1857S

1857S SINGLE UNIT FOR WOOD DOORS

- Same features as 1855 with the addition of a special top guide for wood doors
- Dust proof strikes - 1870 for floor and/or threshold, 1872 for threshold only

1805 ALL STAINLESS STEEL SERIES SURFACE BOLTS



N1805

Custom Lengths Available

- All stainless steel components
- 1" throw
- 8" (N1815) 12" standard (N1825)
- With bracket for lock - suffix L lock by others



- Heavy duty for extreme conditions
- Made of all stainless steel, finish US32D
- 3/4" wide x 3/4" thick bar
- Unit locks automatically. To release press knob toward door while unlatching.



N1805L

Custom Lengths Available

- Special lengths available on request
- Sex bolts available
- Top and bottom strikes available
- With bracket for lock - L lock by others with
- Accepts lock (not provided) with 3/8" max diameter shackle and 1-3/4" min. shackle opening height.

N1805DL

Custom Lengths Available

- 12" (HD1825TB) and 24" (HD1835TB) standard, custom lengths available
- Sex bolts standard
- Supplied with top and bottom strikes

3780 UNIVERSAL COORDINATOR



3780 Universal Coordinator is for pairs of doors up to 8' wide. The long arm holds the active door open until the short arm is depressed by the inactive door. When the doors are closed, the arms are hidden by the stop-mounted aluminum case.

- One size for all pairs of doors up to 8' wide
 - Non-handed
 - Stop mounted
 - Matte black finish (Available)
 - Meets ANSI 156.3, Type 21 requirements (when used with carry bar)
 - Mounting brackets not required when using stop mounted hardware
 - UL listed for use with pairs of swinging doors with astragal
- Not for use with surface vertical rod panic devices

3760 CARRY BAR



- For pair of doors, where inactive door can be opened before active door
- Mounted on inactive door
- USP standard, plated finishes available

3790 GRAVITY COORDINATOR



- For use on pairs of doors to allow inactive door to close before active door
- UL listed for use with pairs of swinging or doors with astragal
- Non-handed
- Stainless steel
- Use on pairs of doors with astragal on:
 - Active door up to 4'
 - Inactive door over 3'4"
 - Both doors over 2'10"