



SAFETY SENSOR FOR INDUSTRIAL DOORS

LZR®-i30

LASER SCANNER

FEATURES

- Cat.2/PL "C" high performance safety solution certified by TÜV for industrial doors
- High level of safety with a three-dimensional, complete presence detection area in front of the door
- Detects objects as small as 2 in.
- Alternative solution to contact edges, light beams, light curtains or any other safety solution
- Option of creating up to 2 virtual push buttons
- Reduces the possibility of collision/tampering damage due to the overhead mounting position
- Easy installation

DESIGNED FOR INDUSTRIAL ENVIRONMENTS

- Filters door vibrations and environmental interferences
- Filters door panel deformation caused by wind force
- Degree of protection: IP65 / NEMA 4
- External, Self Monitoring

LASER DETECTION

- Time of flight measurement: allows field dimensions to be customized (floor changes can be ignored)
- Maximum detection range: 30 ft x 30 ft
- Minimum object detection size: 2 in

EASE OF INSTALLATION


- 3 visible LASER beams show the LASER safety field position
- Automatic teach-in of safety field dimensions
- Safety field depth adjustment through deactivation of curtains



Up to 30 ft x 30 ft of distance

The Premium Industrial Safety Solution

The LZR®-i30, works according to the principle of time of flight. It emits a light impulse and measures the amount of time it takes to receive the impulse back. This accurate technology enables the sensor to scan 4 planes in the front of the door, which helps to significantly reduce hazards within the door threshold and surrounding area.

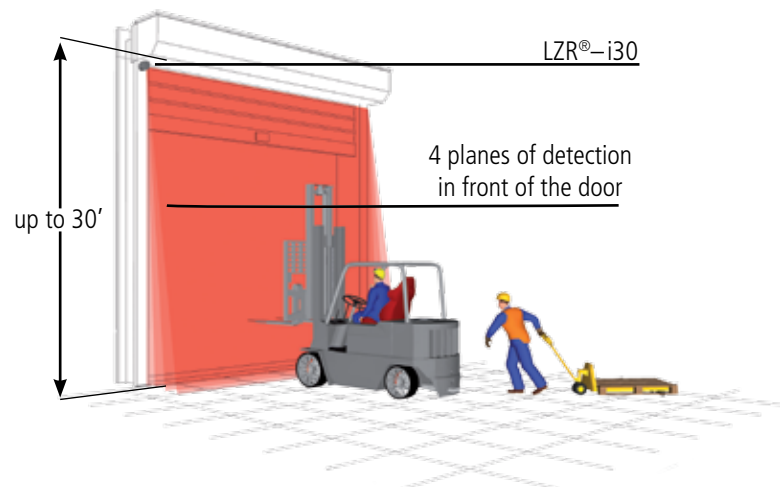

International Door Closers, Inc.

COPYRIGHT 2014 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com



PREMIUM SAFETY SOLUTION FOR ALL INDUSTRIAL DOORS



ROLLING DOORS



FOLDING DOORS



OVERSIZED DOORS



FLEXIBLE DOORS



VIRTUAL PUSH PLATE

TECHNICAL SPECIFICATIONS

Technology	LASER scanner, time-of-flight measurement
Detection Mode	Presence (EN 12453 Typ. E)
Max. Detection Range	30 ft x 30 ft
Remission Factor	> 2%
Emission Characteristics	IR LASER Wavelength 905nm; maximum output pulse power 75W Red Visible LASER Wavelength 650nm; maximum output CW power 3mW
Supply Voltage	12 – 35 VDC @ Sensor Terminal
Peak Current at Power-On	1.8 A (Max. 80 ms @ 35 V)
Power Consumption	< 5W
Response Time	Min 20ms; Max 80ms
Output	2 electronic relays (galvanic isolated – polarity free) Max. Switching Voltage 35V DC / 24V AC Max. Switching Current 80 mA (resistive)
LED-Signal	1 Blue LED: Status « Power-on » 1 Orange LED: Status « Error » 2 Bi-colored LEDs: Status « Detection / Output »
Dimensions (WxLxH)	4.92 in x 3.66 in x 2.76 in (With Mounting Bracket + ½”) / Cable Length 30 ft
Material	PC/ASA
Color	Black
Rotation Angle on Bracket	±5° (Lockable)
Tilt Angle on Bracket	±3°
Degree of Protection	IP65 / NEMA 4
Temperature Range	-22°F to +140°F if powered
Humidity	0–95% non-condensant
Vibrations	< 2G
Pollution on Front Screens	Max. 30% ; Homogenous
Cut Target	< 11.81 in x 7.87 in x 27.56 in @ 23 ft (EN 12445 testbody A)
Norm Conformity	2006/95/EC: LVD; 2002/95/EC : RoHS; EN 60825-1; EN 61000-6-1: EMC-Commercial Level; EN 61000-6-2: EMC - Industrial level; 9.9 < 1999/5/EC : R&TTE; 2004/108/EEC: EMC ; 2006/42/EC: MD EN 60950-1; EN 60529; IEC 60825; EN ISO 13849-1 Performance Level “c”, CAT 2; EN 12445; EN 12453 Typ E

Specifications are subject to change without prior notice.

DISCLAIMER This document as well as all other enclosed documents (quotation / specification / other) are provided «as is» without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will IDC be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / IDC has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.

