



# WEATHER RESISTANT AND WIRELESS PANTHER PLATES

## PUSH PLATES



Panther plates are an easy to mount, wireless, 4¾ inch and 6 inch round, or 4¾ inch square style push plates with an RF 433 code-encrypted security transmitter.

Panther plates are weather-resistant, NEMA 4 rated and offer a complete solution for wireless applications.

### ALL-IN-ONE PLATE, BOX AND TRANSMITTER SOLUTION

#### PRODUCT FAMILY



10EMR61  
6" Round  
Text & Logo



10EMR6  
6" Round  
Text Only



10EMR6L  
6" Round  
Logo Only



10EMR4751  
4.75" Round  
Text & Logo



10EMR475  
4.75" Round  
Text Only



10EMR475L  
4.75" Round  
Logo Only



10EMS4751  
4.75" Square  
Text & Logo




10EMS475  
4.75" Square  
Text Only



10EMS475L  
4.75" Square  
Logo Only

#### COMPONENTS (EMR SERIES SHOWM)

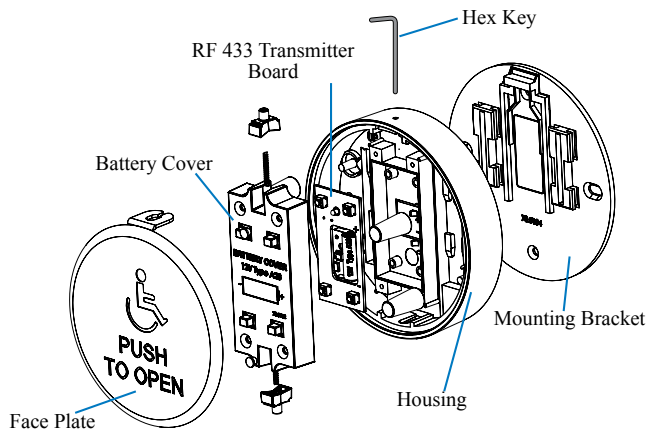

#### FEATURES


- Faceplate surface is made of durable stainless steel
- Tamper-resistant, recessed faceplate with beveled edges
- Slim-line profile with no visible mounting holes
- The fully-assembled unit installs easily with a mounting plate
- Can be used to cover any existing single or double gang boxes
- The housing can be directly installed to any flat surface such as a wall or mounting post (Bollard) using standard screws

International Door Closers, Inc.

COPYRIGHT 2014 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737

[www.intldoorclosers.com](http://www.intldoorclosers.com)




APPLICATIONS

## BENEFITS




- NEMA 4 rated enclosure
- 6 inch and 4.75 inch models
- 304 stainless steel for maximum durability
- Stainless steel materials are 100% recyclable)

## MOUNTING ACCESSORIES

- Hospitals and Healthcare Facilities
- Clean Rooms
- Colleges and Universities
- Elder Care Facilities
- Professional Buildings
- Harsh Environments



## DIMENSION DETAILS

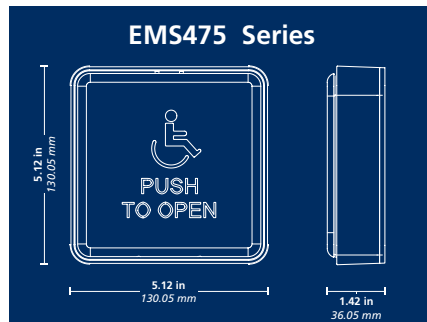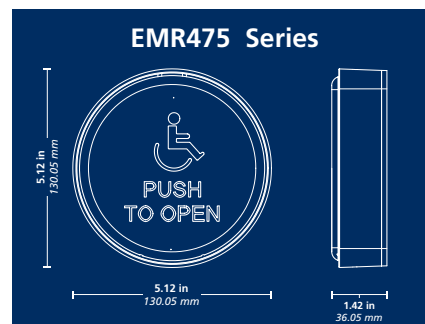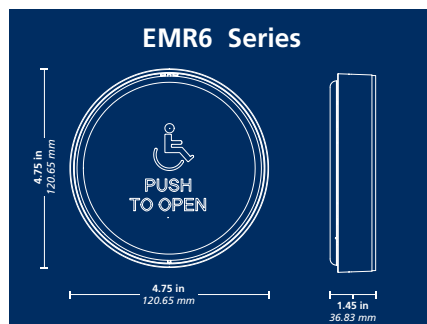

RELATED PRODUCTS



## TECHNICAL SPECIFICATIONS

<b>Dimensions</b>	
EMR6 Series (Ø x D)	6.29 in x 1.45 in
EMR475 Series (Ø x D)	5.12 in x 1.42 in
EMS475 Series (W <sup>2</sup> x D)	5.12 in x 1.42 in
<b>Mounting Options</b>	
Any Flat Surface or Bollard	
<b>Transmitter Design</b>	
Transmitter Type	Encrypted Rolling Code
Transmitter Frequency	433 MHz
<b>Power Source</b>	
12 V Type A23 (included)	
<b>Finish</b>	
16 Gauge, 304 2B Stainless Steel	
<b>Certification</b>	
NEMA 4 FCC IC Part 15 Approved	

**DISCLAIMER** This document as well as all other enclosed documents (quotation / specification / other) are provided «as is» without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will IDC be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / IDC has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.

