



DOOR STOPS

1801 APPLIED STOP


- For use with single or double doors without stops
- Available in all BHMA finishes
- Supplied with machine & woodscrews



1803 FLOOR STOPS

- 1803** 2" diameter x 1-3/8" high bumper rod
5/8" diameter x 3" long
- H1803** 4" diameter x 1-3/8" high bumper rod
5/8" diameter x 3" long
- HD1803** Bumper diameter x height as required rod
1-1/4" diameter x 18" long
- EHD1803** 3-1/4" diameter x 2" high bum For use in
high abuse areas

- Ideal for correctional facilities, schools and institutions
- No exposed fasteners
- Installed with quick set cement

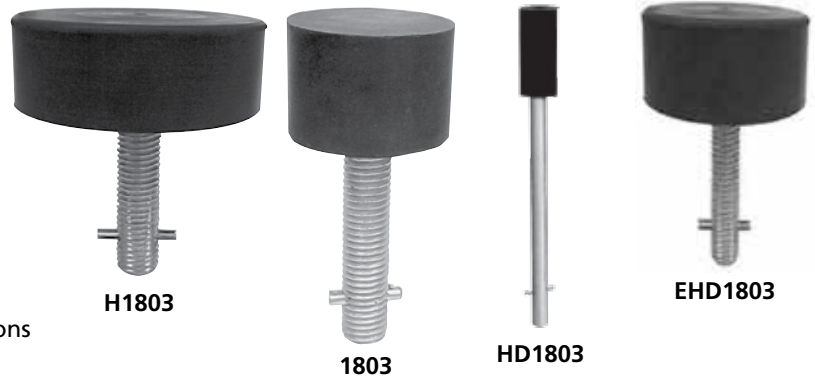

1803HO FLOOR STOP & HOLDER

- Ideal for high abuse installations like schools, heavy doors and correctional facilities.
- Installed with quick set cement
- Door is hooked to portion with a stainless steel hook

1804 PIPE STOP & HOLDER

- Heavy duty construction for use in schools, institutions and correctional facilities
- All stainless steel components with rubber bumper
- The rubber bumper on the door hits the portion when used as a stop
- Door is hooked to portion with stainless steel hook when used as holder
- Floor portion secured in cement
- Door portion - installed with (4) #8 x 1-1/4" screws (supplied standard), sex bolts optional
- Floor portion is solid 1" diameter x 1' long stainless steel rod



International Door Closers, Inc.

COPYRIGHT 2014 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com



CONCEALED / SURFACE MOUNT OVERHEAD DOOR HOLDERS & STOPS



All Overhead Holders/Stops meet ANSI 156.8. Available in all BHMA finishes. When ordering, indicate model number, conflicting hardware, mounting means of the door, door frame opening, thickness of door and finish. N SERIES Overhead Holders/Stops contain all stainless steel components.

1000 SERIES



- For exterior, vestibule or interior single or double acting door
- All stainless steel components
- Prefix N
- Hold-open knob can be disengaged to act as a stop only
- Maximum door opening 110°, minimum door thickness 1-3/4"

1000 SERIES ADJ ADJUSTABLE



- For exterior, vestibule or interior single or double acting door
- All stainless steel components
- Prefix N
- Single point hold-open is field adjustable from 85° to 110°
- Hold-open knob can be disengaged to act as a stop only
- Maximum door opening 110°, minimum door thickness 1-3/4"

1000SL SERIES SLIM LINE



- For exterior, vestibule or interior single or double acting door
- All stainless steel components
- Prefix N (Stop Only)
- 3/4" maximum channel depth
- Maximum door opening 110°, minimum door thickness 1-3/4"

HEAVY DUTY - CONCEALED

DOOR FRAME OPENING		HOLDER NUMBER		
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD OPEN	STOP	FRICTION
27" - 29 15/16"	30" - 32 15/16"	1011	1021	1031
30" - 35 15/16"	33" - 38 15/16"	1012	1022	1032
36" - 39 15/16"	39" - 42 15/16"	1013	1023	1033
40" - 43 15/16"	43" - 46 15/16"	1014	1024	1034
44" + GREATER	47" + GREATER	1015	1025	1035
BHMA NUMBER		C01511	C01541	C01531
FED. SPEC TYPE		1160	—	

HEAVY DUTY - CONCEALED

DOOR FRAME OPENING		HOLDER NUMBER		
BUTTS OFFSET PIVOTS		HOLD OPEN	STOP	FRICTION
27" - 29 15/16"		1011A	1021A	1031A
30" - 35 15/16"		1012A	1022A	1032A
36" - 39 15/16"		1013A	1023A	1033A
40" - 43 15/16"		1014A	1024A	1034A
44" + GREATER		1015A	1025A	1035A
BHMA NUMBER		C01511	C01541	C01531
FED. SPEC TYPE		1160	—	

HEAVY DUTY - CONCEALED

DOOR FRAME OPENING		HOLDER NUMBER	
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD OPEN	STOP
27" - 29 15/16"	30" - 32 15/16"	1011SL	1021SL
30" - 35 15/16"	33" - 38 15/16"	1012SL	1022SL
36" - 39 15/16"	39" - 42 15/16"	1013SL	1023SL
40" - 43 15/16"	43" - 46 15/16"	1014SL	1024SL
44" + GREATER	47" + GREATER	1015SL	1025SL
BHMA NUMBER		C01511	C01541
FED. SPEC TYPE		1160	—

1000SL SERIES ADJ SLIM LINE




- For exterior, vestibule or interior single or double acting door
- 3/4" maximum channel depth
- Maximum door opening 110° , minimum door thickness 1-3/4"
- Single point hold-open is field adjustable from 85° to 110°

3300 SERIES ADJ ADJUSTABLE



- For interior, single acting doors
- All stainless steel components - Prefix N
- Single point hold-open is field adjustable from 85° to 110°
- Maximum door opening 110° , minimum door thickness 1-3/8"
- Available in all BHMA finishes

3400 SERIES HOLDER/STOP

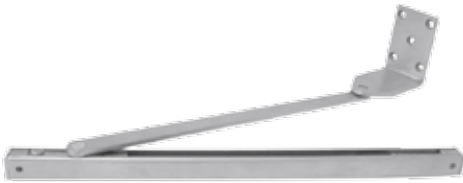

MEDIUM DUTY OVERHEAD - SURFACE MOUNT

- For doors that don't extend to the frame header
- Ideal for dressing room doors, washroom stall doors with frames
- For interior doors with existing parallel arm closers when push side holder would be in conflict with closer .
- All stainless steel components - Prefix N
- 90°, 95°, 100° degree standard door opening –
- Contact factory for other degrees of opening
- Hold open can be made inactive for stop only function
- Minimum door size 24"
- For doors mounted on butt type hinges
- US32D standard, other architectural finishes available

3500 Series PARALLEL ARM HOLDER



HEAVY DUTY - SURFACE MOUNT

- For exterior, vestibule and interior single acting doors 24" to 36"
- 180°, maximum door opening
- Adjustable hold open from 135° to 180°
- Heavy gauge steel and cast iron construction
- Handed, specify when ordering
- Requirements: 1-1/2" min. frame soffit width, 1-3/4" min. top rail, 5" max. butt hinges
- Painted finishes standard
- Auxiliary stop recommended

HEAVY DUTY - CONCEALED

DOOR FRAME OPENING	HOLDER NUMBER	
BUTTS OFFSET PIVOTS	HOLD- OPEN	STOP
27" - 29 15/16"	1011SA	1021SA
30" - 35 15/16"	1012SA	1022SA
36" - 39 15/16"	1013SA	1023SA
40" - 43 15/16"	1014SA	1024SA
44" + GREATER	1015SA	1025SA
BHMA NUMBER	C01511	C01541
FED. SPEC TYPE	1160	—

MEDIUM DUTY - SURFACE MOUNT

DOOR FRAME OPENING	HOLDER NUMBER		
BUTTS OFFSET PIVOTS	HOLD OPEN	STOP	FRICTION
24" - 29 15/16"	3311A	3321A	3331A
30" - 35 15/16"	3312A	3322A	3332A
36" - 42"	3312A	3333A	3333A

4000 SERIES



- For interior single or double acting doors
- All stainless steel components - Prefix N
- Maximum door opening 110°, minimum door thickness 1-3/8"
- Hold-open can be disengaged to act as a stop only

4400 SERIES



- For interior single acting doors
- All stainless steel components - Prefix N
- Hold-open can be disengaged to act as a stop only
- Maximum door opening 110°, minimum door thickness 1-3/8"

7000 SERIES



- For exterior, vestibule and interior single acting doors
- For all stainless steel components, Prefix N
- Maximum door opening 110°, minimum door thickness 1-1/4"
- Wood, machine screws and grommet nuts included

HD7000 SERIES

- Ideal for cell doors, vault doors
- Maximum door opening 110°, minimum door thickness 1-3/4"
- Wood, machine screws and sex bolts included
- For all stainless steel components, Prefix N

MEDIUM DUTY - CONCEALED MOUNT

DOOR FRAME OPENING		HOLDER NUMBER		
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD OPEN	STOP	FRICTION
18" - 23 15/16"	-	4011	4021	4031
24" - 29 15/16"	-	4012	4022	4032
30" - 35 15/16"	32" - 37 15/16"	4013	4023	4033
36" - 48"	38" - 48"	4014	4024	4034
BHMA NUMBER		C04511	C04541	C04531
FED. SPEC TYPE		1166	1166A	1164

MEDIUM DUTY - SURFACE MOUNT

DOOR FRAME OPENING		HOLDER NUMBER		
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD OPEN	STOP	FRICTION
18" - 23 15/16"	22" - 27 7/16"	4411	4421	4431
24" - 29 15/16"	27 1/2" - 33 7/16"	4412	4422	4432
30" - 35 15/16"	33 1/2" - 38 15/16"	4413	4423	4433
36" - 48"	39" - 48"	4414	4424	4434
BHMA NUMBER		C05511	C05541	C05531
FED. SPEC TYPE		1166	1166A	1164

HEAVY DUTY - SURFACE MOUNT

DOOR FRAME OPENING		HOLDER NUMBER	
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD OPEN	STOP
23" - 28 15/16"	24" - 31 15/16"	7010	7020
29" - 34 15/16"	32" - 38 7/16"	7011	7021
35" - 40 15/16"	38 1/2" - 44 3/16"	7012	7022
41" - 46 15/16"	44 1/4" - 50 3/16"	7013	7023
47" + Greater	50 1/4" - 60"	7014	7024
BHMA NUMBER		C08511	C08541
FED. SPEC TYPE		GJ70	GJ70

EXTRA HEAVY DUTY - SURFACE MOUNT - EXTRA HEAVY

DOOR FRAME OPENING		HOLDER NUMBER	
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD OPEN	STOP
224" - 29 15/16"	26" - 31 15/16"	HD7010	HD7020
30" - 35 15/16"	32" - 38 15/16"	HD7011	HD7021
36" - 39 15/16"	39" - 42 15/16"	HD7012	HD7022
40" - 47 15/16"	43" - 50 15/16"	HD7013	HD7023
48" + Greater	51" + Greater	HD7014	HD7024
BHMA NUMBER		C08511	C08541
FED. SPEC TYPE		GJ70	GJ70

International Door Closers, Inc.

COPYRIGHT 2014 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com

8000 SERIES



- For exterior, vestibule and interior single acting doors
- Maximum door opening 110°, minimum door thickness 1-1/4"
- Sex bolts provided for the door portion
- Available in all BHMA plated finishes and US32 & US32D

9000 SERIES



- For exterior, vestibule and interior single acting doors
- All stainless steel components - Prefix N
- Hold-open can be disengaged to act as a stop only
- Maximum door opening 110°, minimum door thickness 1-3/4"
- Available in all BHMA finishes including US32 & US32D

9000 SERIES ADJ ADJUSTABLE



- For exterior, vestibule and interior single acting doors
- For all stainless steel components, Prefix N
- Single point hold-open, field adjustable from 85° to 110°
- Hold-open can be disengaged to act as a stop only
- Maximum door opening 110°, minimum door thickness 1-3/4"
- Available in all BHMA finishes including US32 & US32D

HEAVY DUTY - SURFACE MOUNT

DOOR FRAME OPENING		HOLDER NUMBER	
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD OPEN	STOP
27" - 32 7/16"	29 1/2" - 34 15/16"	8010	8020
32 1/2" - 38 11/16"	35" - 41 7/16"	8011	8021
38 3/4" - 42 7/16"	41 1/2" - 44 15/16"	8012	8022
42 1/2"+ Greater	45" + Greater	8013	8023
BHMA NUMBER		C03511	C03541
FED. SPEC TYPE		GJ80	GJ80

HEAVY DUTY - SURFACE MOUNT

DOOR FRAME OPENING		HOLDER NUMBER		
BUTTS OFFSET PIVOTS	CENTER HUNG	HOLD OPEN	STOP	FRICTION
28" - 29 15/16"	30" - 33 15/16"	9011	9021	9031
30" - 31 15/16"	34" - 35 15/16"	9012	9022	9032
32" - 35 15/16"	36" - 38 15/16"	9013	9023	9033
36" - 39 15/16"	39" - 40 15/16"	9014	9024	9034
40" - 41 15/16"	41" - 44 15/16"	9015	9025	9035
42" - 43 15/16"	45" - 46 15/16"	9016	9026	9036
44" + Greater	47" + Greater	9017	9027	9037
BHMA NUMBER		C02511	C02541	C02531
FED. SPEC TYPE		1161	116A	---

HEAVY DUTY - SURFACE MOUNT

DOOR FRAME OPENING	HOLDER NUMBER		
BUTTS OFFSET PIVOTS	HOLD OPEN	STOP	FRICTION
28" - 31 15/16"	9011A	9021A	9031A
32" - 39 15/16"	9012A	9022A	9032A
40" - 43 1 5/16"	9013A	9023A	9033A
44" + Greater	9014A	9024A	9034A