




GRADE 2 CYLINDRICAL LOCKS
3000 SERIES
 NON-CLUTCHED

FEATURES

- Non-clutched mechanism
- 3000L (Lever)
- 3000K (Knob)
- Heavy duty lever spring return rose assembly
- Bidirectional lever operation, non-handed
- Solid brass latch bolt
- Solid brass Schlage c pin keyway cylinder
- Meets Fire Code (California State Reference Code)
- UL and CUL Listed
- Five year warranty

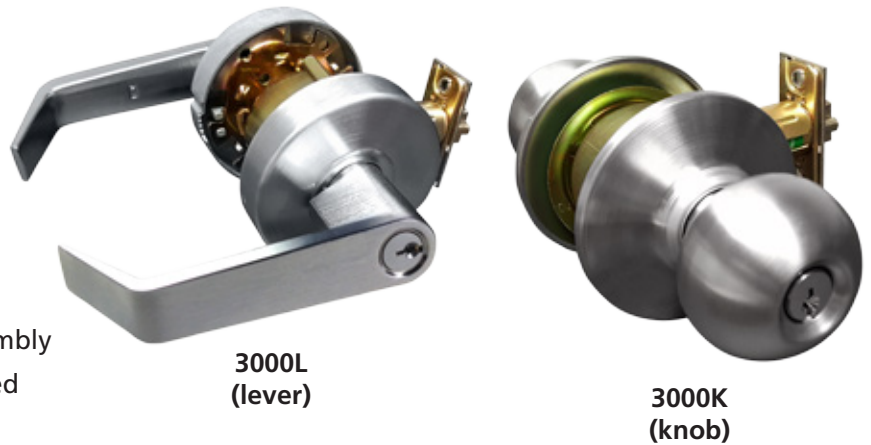

**3000L
(lever)**

**3000K
(knob)**

Grade 2 Cylindrical Locks

IDC 3000L locksets meet ADA requirements. Our 3000L and 3000K medium duty key-in locksets are designed to exceed the ANSI/BHMA A156.2 Grade 2 requirements.

SPECIFICATION

Application	For offices, schools, hospitals, apartments, hotels, motels and other public buildings
For Doors	1 ³ / ₈ " to 1 ³ / ₄ " (35mm to 45mm)
Backset	2 ³ / ₈ " (60mm) or 2 ³ / ₄ " (70mm) standard
Front	Brass, Bronze: 2 ¹ / ₄ " X 1" standard. 2 ¹ / ₄ " X 1 ¹ / ₈ " optional Adjustable for Flat or Beveled doors 1 ¹ / ₈ " in 2"
Strike	ST1 ANSI 1-1/4" x 4-7/8" (Standard)
Roses	Brass or Bronze
Hand	Universal, non-handed
Latch bolt	Brass. 1/2" Latch bolt standard. Stainless steel, 1/2" Latch bolt optional
Keys	Two Brass
Cylinder	Brass Schlage C pin keyway standard Weiser. Arrow. Lockwood C 4. Kwikset optional
Masterkeying	Can be masterkeyed or grand masterkeyed. Construction key system available
Non-clutched	Non-clutched mechanism, free Wheeling not available.
Interchangeable Core	Interchangeable core will accept compatible 6 or 7 pin cores with BEST or SARGENT
Finishes (US Code)	3, 4, 5A, 10, IOB, 11, 15, 15A, 19, 26, 26D
Split Finishes	Outside finish specified first. Front & Strike finished to match inside trim unless otherwise specified
UL/CUL	Listed for use on fire doors (3 Hour Rated)

3000 SERIES

NON-CLUTCHED

Ordering Information



**3000L
(lever)**



**3000K
(knob)**

FUNCTION	TRIM	IDC	ANSI	DESCRIPTION
	LEVER	10	F75	Passage or Closet Latch - Latch bolt operated by lever, from either side at all times
	LEVER	40	F76	Privacy, Bedroom or Bath Lock – Latch bolt operated by lever from either side. Outside lever is locked by push button unlocked by emergency release outside, operating inside lever or closing door.
	LEVER	53	F82	Entry Lock - Dead locking latch bolt operated by lever from either side except when outside lever is locked by push or turn button. When outside lever is locked, operating key in outside lever or operating inside lever unlocks push button and retracts latch bolt. Closing door does not release push button.
	LEVER	70	F84	Classroom Lock - Dead locking latch bolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked latch bolt is operated by inside lever.
	LEVER	80	F86	Storeroom or Closet Lock – Dead locking latch bolt operated by key in outside lever, or by operating inside lever. Outside lever is always inoperable.
	LEVER	25	F111	Exit or Communicating Passage Lock – Dead locking latch bolt operated by lever one side only at all times. Non removable blank trim or no trim outside.
	LEVER	170		Dummy Trim 1 Side - Used as door pull or as matching inactive trim
	KNOB	53	F109	Entrance – Pushing turn-button in inside knob locks outside knob. Turning inside knob or operating key in outside knob releases button automatically. Closing door does not release button. Button is fixed in the locked position by turning to horizontal position.
	KNOB	80	F91	Double Cylinder - Deadlocking knob operated by either side. Key either locks or unlocks both sides.
	KNOB	170	F111	Exit Non-Key – Blank knob plate outside. Inside knob always unlocked.

