



GRADE 2 CYLINDRICAL LOCKS

4000L SERIES

CLUTCHED LOCKSETS

FEATURES

- Heavy duty lever spring return rose assembly
- Bidirectional lever operation, non-handed
- Convertible posts
- Available with Free Wheeling Mechanism
- Solid brass latch bolt
- Solid brass Schlage c pin keyway cylinder
- Meets Fire Code (California State Reference Code)
- UL and CUL Listed
- Five year warranty



Grade 2 Cylindrical Locks

IDC 4000L locksets meet ADA requirements, medium duty key-in-lever lockset designed to exceed the requirements of ANSI A156.2 Series 4000 and Grade 2.








SPECIFICATION

Application	For offices, schools, hospitals, apartments, hotels, motels and other public buildings
For Doors	1 ³ / ₈ " to 1 ³ / ₄ " (35mm to 45mm)
Backset	2 ³ / ₈ " (60mm) or 2 ³ / ₄ " (70mm) standard
Front	Brass, Bronze: 2 ¹ / ₄ " X 1" standard. 2 ¹ / ₄ " X 1 ¹ / ₈ " optional Adjustable for Flat or Beveled doors 1 ¹ / ₈ " in 2"
Strike	ST1 ANSI 1-1/4" x 4-7/8" (Standard)
Roses	Brass or Bronze
Hand	Universal, non-handed
Latch bolt	Brass. 1/2" Latch bolt standard. Stainless steel, 1/2" Latch bolt optional
Keys	Two Brass
Cylinder	Brass Schlage C pin keyway standard Weiser, Arrow. Lockwood C 4. Kwikset optional
Masterkeying	Can be masterkeyed or grand masterkeyed. Construction key system available
Free Wheeling Mechanism	Free Wheeling available on all keyed locks and Privacy function on request
Interchangeable Core	Interchangeable core will accept compatible 6 or 7 pin cores with BEST or SARGENT
Finishes (US Code)	3, 4, 5A, 10, IOB, 11, 15, 15A, 19, 26, 26D
Split Finishes	Outside finish specified first. Front & Strike finished to match inside trim unless otherwise specified
UL/CUL	Listed for use on fire doors (3 Hour Rated)

4000L SERIES

CLUTCHED LOCKSETS



FUNCTION	IDC	ANSI	DESCRIPTION
	10	F75	Passage or Closet Latch - Latch bolt operated by lever, from either side at all times
	40	F76	Privacy, Bedroom or Bath Lock – Latch bolt operated by lever from either side. Outside lever is locked by push button unlocked by emergency release outside, operating inside lever or closing door.
	53	F82	Entry Lock - Dead locking latch bolt operated by lever from either side except when outside lever is locked by push or turn button. When outside lever is locked, operating key in outside lever or operating inside lever unlocks push button and retracts latch bolt. Closing door does not release push button.
	70	F84	Classroom Lock - Dead locking latch bolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked latch bolt is operated by inside lever.
	80	F86	Storeroom or Closet Lock – Dead locking latch bolt operated by key in outside lever, or by operating inside lever. Outside lever is always inoperable.
	25	F111	Exit or Communicating Passage Lock – Dead locking latch bolt operated by lever one side only at all times. Non removable blank trim or no trim outside.
	170		Dummy Trim 1 Side - Used as door pull or as matching inactive trim

GRADE 2 CYLINDRICAL LOCKS 4000L SERIES

Options

CLUTCHED LOCKSETS

IDC Function



- 10 Passage
- 40 Privacy, Bedroom or Bath Lock
- 53 Entrance Lock
- 70 Classroom Lock
- 80 Storeroom
- 25 Communicating Passage Lock
- 170 Dummy Trim, 1 Side, Eclipse



Lever Trim

Mechanical Locksets



R Type



L Type (standard)



R-IC Type
Finish



L-IC Type




- | | |
|--------------------------------|--------------------------------|
| Q 626 Dull Chrome (std) | H 613 Oil Rubbed Bronze |
| C 605 Bright Brass | D 606 Dull Brass |
| F 611 Bright Bronze | G 612 Dull Bronze |
| P 625 Bright Chrome | |


Latch bolt



Deadlatch



Springlatch

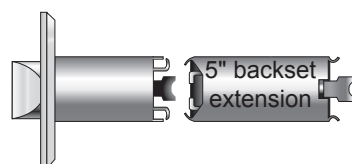

5" backset
extension

- B1** 2-3/4" dead latch (standard)
- B2** 2-3/8" dead latch


- B3** 2-3/4" spring latch, passage (standard)
- B4** 2-3/8" spring latch, passage

- B5** 2-3/4" spring latch, privacy (standard)
- B6** 2-3/8" spring latch, privacy


BE 5" backset extension, for use with 2-3/4" latch only

How to Specify


Strike



ST2



ST3



ST4

- ST1** ANSI 1-1/4" x 4-7/8" (Standard)
- ST2** T-Strike with dust box, ANSI 1-1/8" x 2-3/4"
- ST3** Full lip strike, 1-5/8" x 2-1/4"
- ST4** Full lip strike with round corners, 1-5/8" x 2-1/4"

Cylinder or I-Cores



IDC Conventional Cylinders (Schlage 'C' Keyway Standard)
For RIC or LIC Type

- 6PKA** 6 PIN Keyed alike
- 6PKD** 6 PIN Keyed different (standard)



IC

IDC Interchangeable Core (Best 'A' Keyway Standard)
For RIC or LIC Type

- IC6P-KA** 6 pin I-Core, small format, keyed alike
- IC6P-KD** 6 pin I-Core, small format, keyed different
- IC7P-KD** 7 pin I-Core, small format, keyed different
- IC7P-KA** 7 pin I-Core, small format, keyed alike

International Door Closers, Inc.

COPYRIGHT 2018 INTERNATIONAL DOOR CLOSERS, INC

West: 800-544-4422 • East: 800-225-6737

www.intldoorclosers.com