




UL LISTED ELECTROMAGNETIC LOCKS  
**MAGLOCKS**  
 ULTIMATE PROTECTION


**FEATURES**

- Lock status sensor (bond sensor) and visual LED on 600 and 1200 lb models
- Includes adjustable relock time delay (0 – 90 secs)
- Field selectable 12/24V DC
- Installation hardware included for typical applications
- Convenient plug-in wire terminals
- Available for single doors and double doors without center mullion

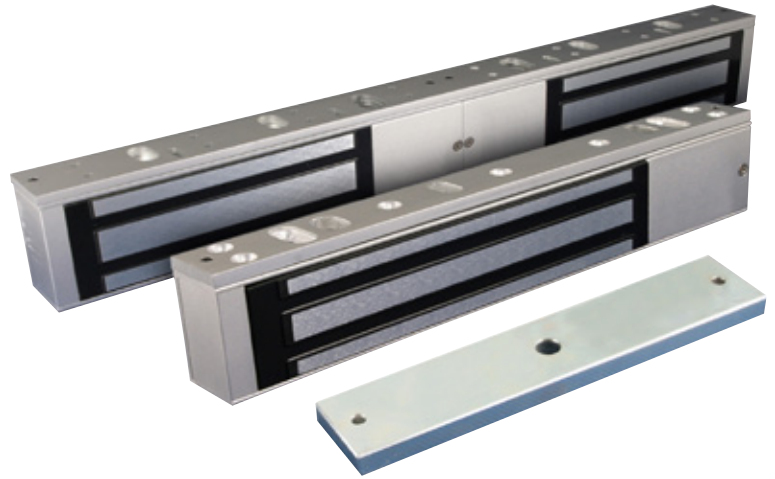

**EASY INSTALLATION  
 MULTIPLE MODELS**

IDC Maglocks offer the ultimate protection for most access control applications.



**10MAGLOCK1UL**  
 1200LB – SINGLE




**10MAGLOCK3UL**  
 600LB – SINGLE



**10MAGLOCK5UL**  
 1200LB – DOUBLE




**10MAGLOCK6UL**  
 600LB – DOUBLE



**10LZBRMAG1UL**  
 (1) 'L' and (1) 'Z'



**10LZBRMAG3UL**  
 (1) 'L' and (1) 'Z'



**10UBRACKETUL**  
 U-Bracket – Glass Doors

use with  
**10MAGLOCK3UL**



**MAG5LZUL**  
**MAG6LZUL**  
 (2) 'L' and (2) 'Z'



**10FILLER12UL**  
**10FILLER34UL**  
 FILLER BAR



Vertical Spacer Bars



Armature Housing


**International Door Closers, Inc.**


COPYRIGHT 2017 INTERNATIONAL DOOR CLOSERS, INC

**West: 800-544-4422 • East: 800-225-6737**


**www.intldoorclosers.com**

## TECHNICAL SPECIFICATIONS

10MAGLOCK3UL Single 10MAGLOCK6UL Double	HOLDING FORCE 600 lbs	INPUT VOLTAGE 12 or 24V DC <i>Note: This product is recommended to be used with a UL-Listed Power Supply</i>	CURRENT DRAW Single 0.50A @ 12V DC 0.25A @ 24V DC Dual 1.00A @ 12 VDC 0.50A @ 24V DC	DIMENSIONS Single 9.84" × 1.85" × 1.02" (250mm × 47mm × 26mm) Dual 19.76" × 1.85" × 1.02" (502mm × 47mm × 26mm)	HOLD TIMER 0-90 sec
					

10MAGLOCK1UL Single 10MAGLOCK5UL Double	HOLDING FORCE 1200 lbs	INPUT VOLTAGE 12 or 24V DC <i>Note: This product is recommended to be used with a UL-Listed Power Supply</i>	CURRENT DRAW Single 0.50A @ 12V DC 0.25A @ 24V DC Dual 1.03A @ 12V DC 0.52A @ 24V DC	DIMENSIONS Single 10.47" × 2.91" × 1.58" (266mm × 74mm × 40mm) Dual 20.94" × 2.91" × 1.58" (532mm × 74mm × 40mm)	HOLD TIMER 0-90 sec
					

## MAGLOCK APPLICATIONS

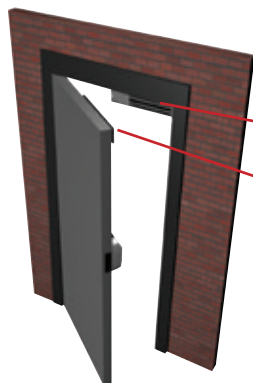


• Swinging Door Application

- ▶ Install IDC Maglocks in security applications including: portals in hotels, retail outlets or where egress control is needed

Maglocks

Armature Plate

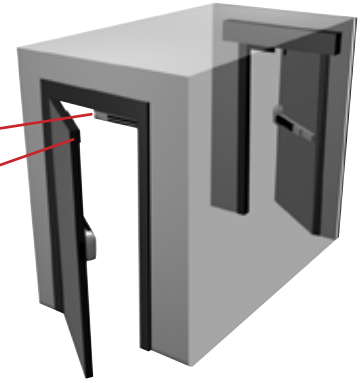


• Clean Room / Airlock Application

- ▶ IDC Maglocks, when combined with IDC's other security products, are designed to ensure ultimate security in clean room, airlock, and also mantrap applications

## RELATED PRODUCTS



**R2E-100**  
UL / ULC Listed, Active Infrared, Request To Exit Detector designed for access control applications



**Weather Resistant Maglocks**  
Increased protection on more heavy duty doors and gates



**Cylindrical Strikes**  
UL / ULC Listed, low profile, all-in-one, universal electric strike



**Rim/Exit Strikes**  
UL / ULC Listed, surface mount electric strike