



SLIDING DOORS

# ENTRA-SLIDE SL10.4L



## FEATURES AND BENEFITS

- A self-supporting structural header with full hinged covers
- A microprocessor control with self-diagnostic 13 LED light visual indicators.
- Full break-out capability
- Full vertical height interlock with double weather strip seal
- Electronic locking device

**International Door Closers** offers automatic and manual sliding door systems to answer any entrance requirements

## NO WHEELS NO TRACKS LINEAR BEARING MOTION BELT DRIVE

### TECHNICAL FEATURES:

- RELIABLE AND SAFE OPERATION
- EASY INSTALLATION AND SERVICE
- HIGH SPEED & SMOOTH OPERATION
- USER FRIENDLY LCD-DISPLAY FOR SETTINGS AND ADJUSTMENTS
- LOWER COST OF OWNERSHIP
- FULL VERTICAL HEIGHT INTERLOCK WITH DOUBLE WEATHER STRIP SEAL
- HI-TECH BEARING MOTION
- MEETS **ANSI A156.10** GUIDELINES FOR COMMERCIAL APPLICATIONS
- EASY MANUAL SLIDE OPERATION IN CASE OF POWER FAILURE
- BRUSHLESS DC-MOTOR AND ENCLOSED HYPOID GEAR SYSTEM
- MICROPROCESSOR CONTROL WITH SELF-DIAGNOSTIC CONTROL BOARD
- ELECTRONIC LOCKING DEVICE

**International Door Closers, Inc.**


COPYRIGHT 2017 INTERNATIONAL DOOR CLOSERS, INC

**West: 800-544-4422 • East: 800-225-6737**

**www.intldoorclosers.com**

## PRODUCT DESCRIPTION & SPECIFICATIONS

### ENTRA-SLIDE SL10 4L - DETAILED SECTIONS

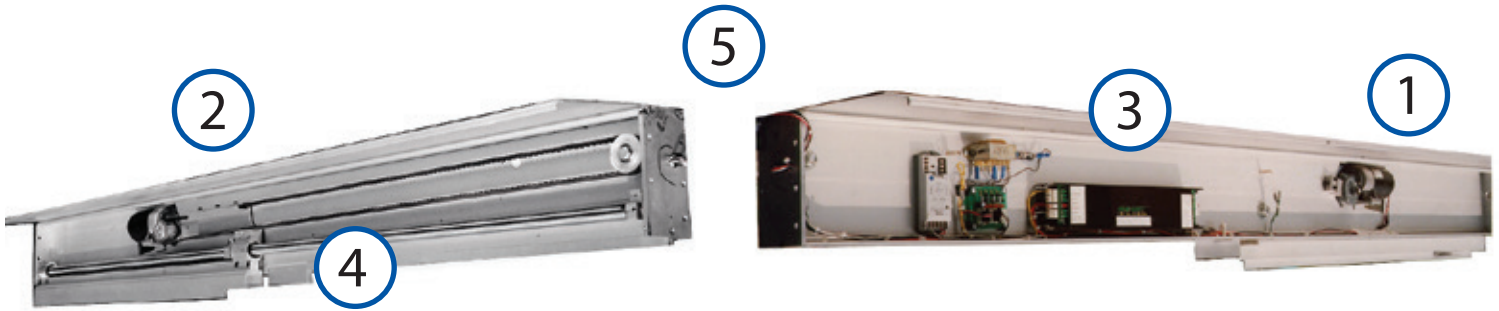

## SYSTEM FEATURES

#### 1) MOTOR:

- DC Low Voltage
- MADE IN USA

#### 2) DRIVE BELT:

- WIDE Full 1" (25mm) width.

#### 3) CONTROL:

- Microprocessor with Self-Diagnostics.
- 7 segment LED display.
- Keyed plug-in wiring.
- Adjustable latch/ back check control.

#### 4) DOOR TRAVEL:

- Linear Motion Ball Bearing Technology.
- 1" (25mm) chrome plated hardened steel rod.  
(Corrosion Resistant)

#### 5) SELF-SUPPORTING STRUCTURAL HEADER WITH FULL LENGTH HINGED COVERS.

#### 6) FULL BREAK-AWAY CAPABILITY.

#### 7) VERTICAL FULL HEIGHT INTERLOCK:

#### 8) ELECTRONIC LOCKING DEVICE:

- Enclosed in the control box.
- The panel(s) can break-out at any time.



**NO WHEELS NO TRACKS**  
LINEAR BEARING MOTION - BELT DRIVE


**International Door Closers, Inc.**

COPYRIGHT 2017 INTERNATIONAL DOOR CLOSERS, INC

**West: 800-544-4422 • East: 800-225-6737**  
**www.intldoorclosers.com**


# PRODUCT DESCRIPTION & SPECIFICATIONS

## ENTRA-SLIDE SL10 4L - DETAILED SECTIONS

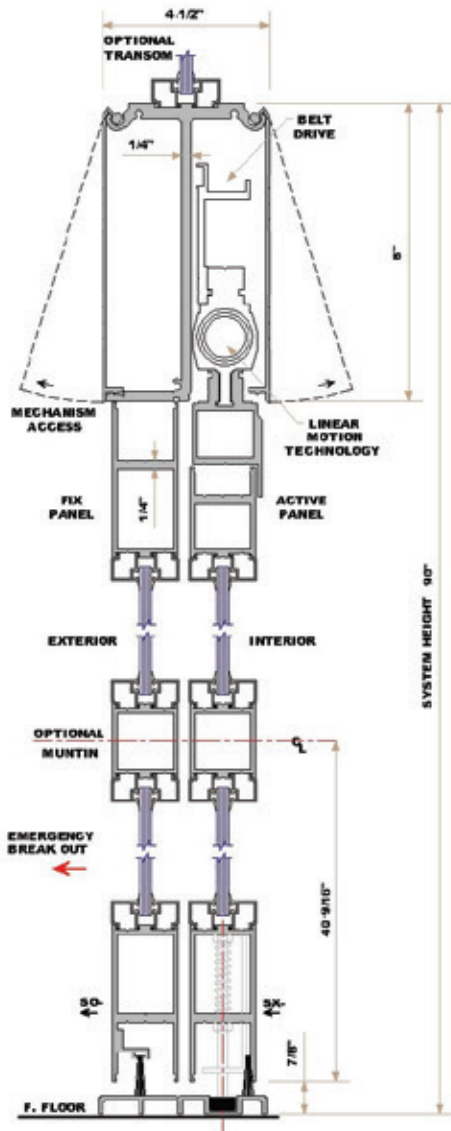


### Dimension Guide


SINGLE SLIDE UNIT SIZES		
Standard Unit Width	Standard Unit Height	Standard Opening
6'-6"	7'-6"	33"
7'-0"	7'-6"	36"
8'-0"	7'-6"	42"
9'-0"	7'-6"	48"




BI-PART SLIDE UNIT SIZES		
Standard Unit Width	Standard Unit Height	Standard Opening
8'-0"	7'-6"	36"
9'-0"	7'-6"	42"
10'-0"	7'-6"	48"
12'-0"	7'-6"	60"
14'-0"	7'-6"	72"



SLIDE BY SIDE UNIT SIZES		
Standard Unit Width	Standard Unit Height	Standard Opening
128"	7'-6"	38"
144"	7'-6"	44"




TELESCOPIC SLIDE UNIT SIZES		
Standard Unit Width	Standard Unit Height	Standard Opening
78"	7'-6"	45"
88"	7'-6"	51"
98"	7'-6"	56"



### Note:

- 1 - Other type of bottom guide and Threshold available.
- 2 - Overhead concealed or surface mount.
- 3 - Full breakout, fixed sidelite, or pocketed.
- 4 - Accommodates 1/4", 5/8" or 1" glass.

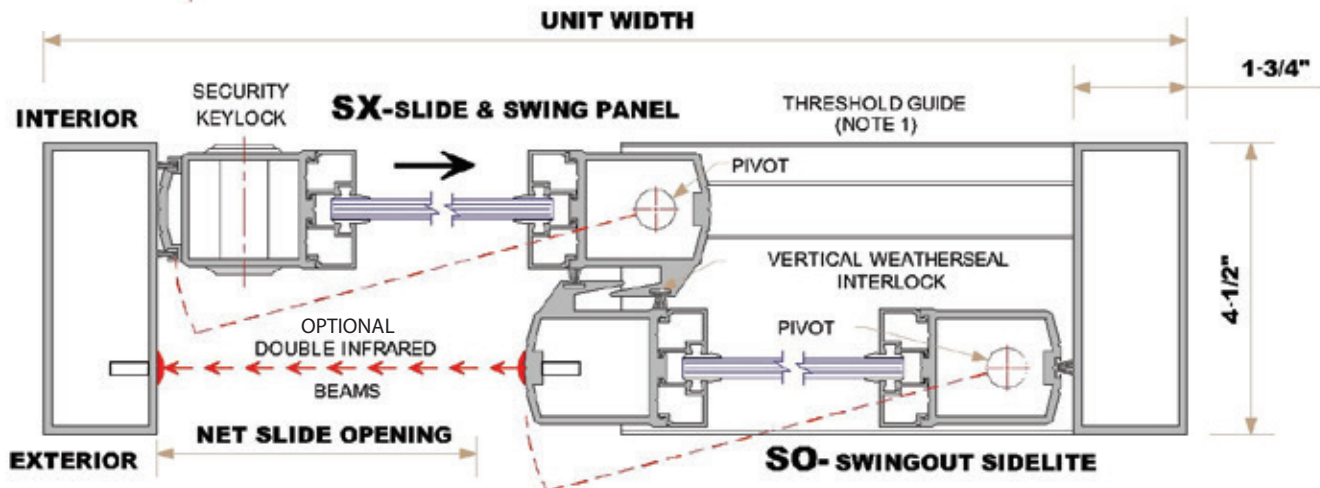

## PRODUCT DESCRIPTION & SPECIFICATIONS

### ENTRA-SLIDE SL10 4L - OPTIONS

## WE ARE REVOLUTIONIZING ACCESS CONTROL WITH ONE SIMPLE SOLUTION



#### OPTIONAL ELECTRONIC LOCKING AND CARD READER ENTRY.

The industry's first panel-free IP reader controller to deliver true Power Over Ethernet, our PowerNet Reader provides the freedom to secure an unlimited number of doors without the hassle of having to wire panels or hubs.

#### OPTIONAL BATTERY BACKUP FOR UP TO ½ HOUR OF CONTINUOUS USE

#### OPTIONAL PAINTED FINISH, POWDER COATED FINISH OR CLAD FINISH

#### CUSTOM SIZES (CSTM) AVAILABLE, PLEASE CONSULT FACTORY FOR LIMITATIONS

## CAMERA S15

Discreet. Flexible. Hemispheric.



- HOLD HARMLESS INDEMNIFICATION AGREEMENT OFFERED TO END USERS. (WITH THE USE OF HIGH RESOLUTION CAMERA)
- DECENTRALIZED CONCEPT WITH MICRO SD CARD THUS ALLOWING LOWER NETWORK BANDWIDTH.
- FULL IMAGE RECORDING WITH PTZ CAPABILITIES VIA SOFTWARE (NO MOVING PARTS).
- FREE VIDEO MANAGEMENT SOFTWARE (MX EASY) FOR LIFE. (NO LICENSING FEES)
- CAMERAS HAVE MICROPHONE / SPEAKER PHONE CAPABILITIES BUILT IN.
- HEMISPHERIC DUAL LENS ALLOWING TO SIMULTANEOUSLY SECURE TWO SEPARATE ROOMS WITHOUT ANY BLIND SPOTS.


## IXIO ACTIVATION AND SAFETY SENSOR FOR AUTOMATIC SLIDING DOORS



The IXIO combines microwave radar technology for the activation of the door with infrared technology for pedestrian safety. The unidirectional radar provides energy savings and an infrared curtain for sliding door safety as pedestrians pass through the threshold.



DISTRIBUTOR OF TUCKER  
AUTO-MATION DOOR PRODUCTS

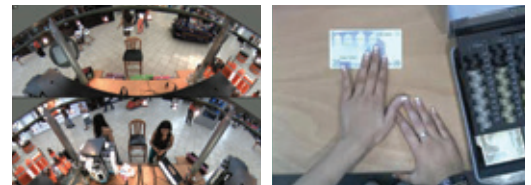

#### Note

Technical details and recommendations on our products are based upon experience and represent guidelines for the user. Details in brochures and specification sheets do not guarantee any special product features, apart from those we confirmed in individual cases. We reserve the right to make changes as the result of technical developments.

**International Door Closers, Inc.**

COPYRIGHT 2017 INTERNATIONAL DOOR CLOSERS, INC

**West: 800-544-4422 • East: 800-225-6737**

**www.intldoorclosers.com**