



# DOOR STOPS

## 1801 APPLIED STOP


- For use with single or double doors without stops
- Available in all BHMA finishes
- Supplied with machine & woodscrews



## 1803 FLOOR STOPS

- 1803** 2" diameter x 1-3/8" high bumper rod  
5/8" diameter x 3" long
- H1803** 4" diameter x 1-3/8" high bumper rod  
5/8" diameter x 3" long
- HD1803** Bumper diameter x height as required rod  
1-1/4" diameter x 18" long
- EHD1803** 3-1/4" diameter x 2" high bum For use in  
high abuse areas

- Ideal for correctional facilities, schools and institutions
- No exposed fasteners
- Installed with quick set cement

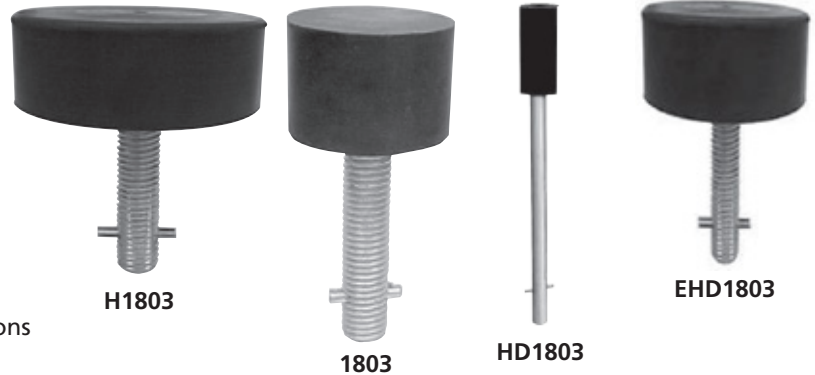

## 1803HO FLOOR STOP & HOLDER

- Ideal for high abuse installations like schools, heavy doors and correctional facilities.
- Installed with quick set cement
- Door is hooked to portion with a stainless steel hook

## 1804 PIPE STOP & HOLDER

- Heavy duty construction for use in schools, institutions and correctional facilities
- All stainless steel components with rubber bumper
- The rubber bumper on the door hits the portion when used as a stop
- Door is hooked to portion with stainless steel hook when used as holder
- Floor portion secured in cement
- Door portion - installed with (4) #8 x 1-1/4" screws (supplied standard), sex bolts optional
- Floor portion is solid 1" diameter x 1' long stainless steel rod



**International Door Closers, Inc.**

COPYRIGHT 2018 INTERNATIONAL DOOR CLOSERS, INC

**West: 800-544-4422 • East: 800-225-6737**

**www.intldoorclosers.com**